



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) EP 0 812 599 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

17.12.1997 Bulletin 1997/51

(51) Int. Cl.⁶: A61M 25/01

(21) Application number: 97114538.8

(22) Date of filing: 06.05.1992

(84) Designated Contracting States:

AT BE CH DE DK ES FR GB GR IT LI LU MC NL
SE

(30) Priority: 07.05.1991 US 696585

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:

92912258.8 / 0 585 359

(71) Applicant:

TARGET THERAPEUTICS, INC.
Fremont, CA 94537-5120 (US)

(72) Inventor: Sepetka, Ivan

Redwood City, California 94063 (US)

(74) Representative:

Price, Nigel John King
J.A. KEMP & CO.
14 South Square
Gray's Inn
London WC1R 5LX (GB)


(54) Catheter guide wire

(57) A guidewire (10) for use within a patient's vas-
culature, comprising in combination:

- (a) a semi-rigid, torqueable proximal wire section (13),
- (b) a more flexible intermediate section (14), and
- (c) a most flexible distal end section (15) formed from a distal wire core segment with a helical coil (27) covering the distal end segment and providing column strength thereto,

characterised in that the intermediate section (14) of the guidewire comprises a torsionally reinforced structure (22), the torsionally reinforced structure (22) cooperating with the wire core (16) to improve torque transmission along the guide wire and to increase radiopacity of the intermediate section (14) over that of the bare intermediate core segment without substantially increasing its stiffness.

FIG. 1

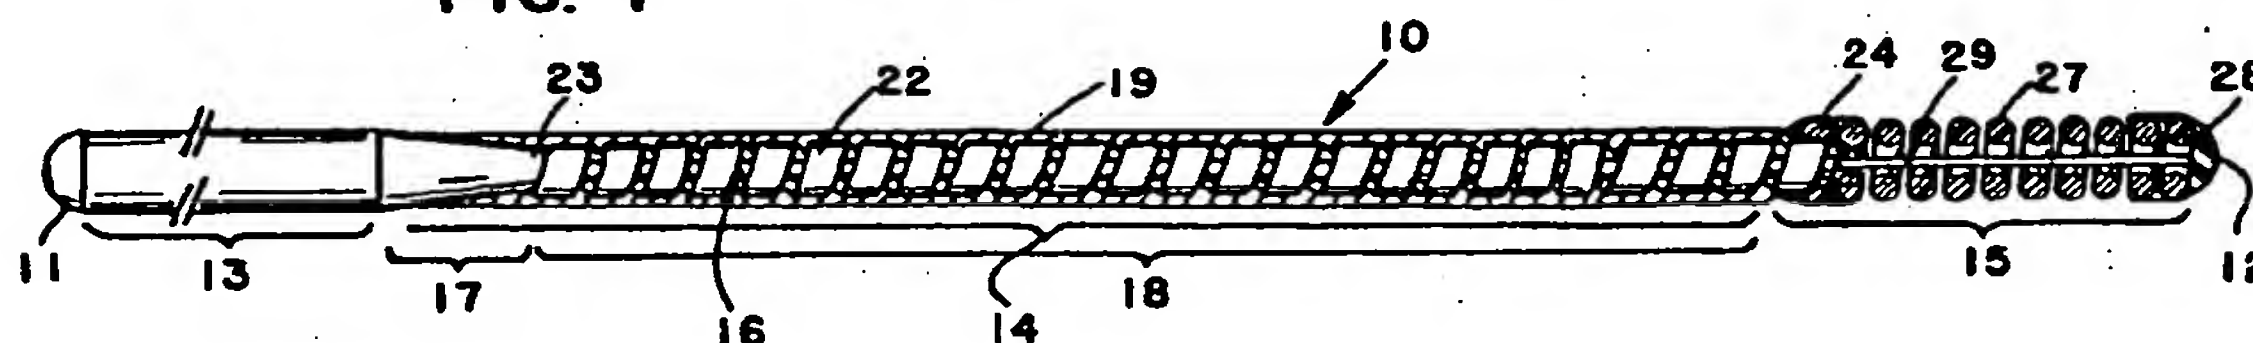

EP 0 812 599 A2

Description

Technical Field

This invention is in the general field of surgical instruments and relates specifically to guide wires that are used in cardiovascular and endovascular procedures to facilitate the placement of catheters within the vasculature of patients.

Background

The general procedure for placing catheters within vessels is to track a guide wire through the vessel to the desired position and advance the catheter over the guide wire. Guide wires are required because the catheters themselves do not have sufficient column strength or torsional strength to be able to be tracked or steered through the vessel. See, for instance, U.S. Patent No. 4,884,579.

Several types of guide wires for use in catheter placement have been proposed. The simplest type of wire has a preferred diameter of between about 0.20-1.0 mm. The distal end of the wire may be provided with a bent tip which can be oriented, by means of a guide structure at the proximal end, to guide the wire along a selected vascular path. Ideally, torque transmission should be controlled, such that a selected wire rotation at the wire's proximal end produces a corresponding rotation of the distal end. Further, radiopacity is desired such that a physician may see over the entire vasculature accessed by the guide wire.

US-A-4,884,579 discloses a catheter guide wire with three sections with progressively greater flexibility and sliding properties: 1. a semi-rigid, torqueable proximal wire section that is between about 50-250 cm in length, formed of a proximal wire core segment having an outer diameter of between about 0.25-1.0 mm; 2. a more flexible intermediate section that has a length between about 20-60 cm and is formed from an intermediate wire-core segment having a reduced diameter of between about 0.10-0.50 mm, and a low-friction, flexible polymer tube covering which encases the intermediate core segment; and 3. a most distal end section with a length between about 1-10 cm and formed from a distal wire core segment having a reduced diameter of between about 0.05-0.15 mm, and a flexible sleeve covering the distal end segment and providing column strength thereto.

According to the present invention there is provided a guidewire for use within a patient's vasculature, comprising in combination:

- (a) a semi-rigid, torqueable proximal wire section,
- (b) a more flexible intermediate section, and
- (c) a most flexible distal end section formed from a distal wire core segment with a helical coil covering the distal end segment and providing column strength thereto, characterised in that the interme-

mediate section of the guidewire comprises a torsionally reinforced structure, the torsionally reinforced structure cooperating with the wire core to improve torque transmission along the guide wire and to increase radiopacity of the intermediate section over that of the bare intermediate core segment without substantially increasing its stiffness.

Embodiments of guidewire constructed in accordance with the present invention will now be described, by way of example only, with reference to the accompanying drawings, described below.

Fig. 1 shows fragmentary portions of a guide wire constructed according to one embodiment of the invention;

Fig. 2 shows fragmentary portions of a guide wire constructed according to another embodiment of the invention.

Like parts are referred to by the same reference numerals in the Figures.

Fig. 1 shows a guide wire generally designated 10, constructed according to one embodiment of the invention. The wire is a flexible torqueable wire having an overall length of about 70-300 cm between its proximal and distal ends 11 and 12, respectively, and a maximum outer diameter of between about 0.20-1.0 mm. The major portion of the wire is a flexible proximal section 13 whose overall length ranges from about 50-250 cm. This section is followed by a more flexible intermediate section 14 having a length between about 20-60 cm and a most flexible distal end section 15 whose length is between about 1-10 cm.

A wire core 16 in the guide wire 10 is formed of a flexible, torqueable wire filament material, such as stainless steel. The diameter of the wire core, at its maximum, is between about 0.20-1.0 mm. The segment of the core forming proximal section 13 of guide wire 10 has a substantially uniform diameter along its length, and corresponds to the maximum diameter of the core, i.e., between 0.20-1.0 mm.

Within the intermediate section 14 of the wire, the core is tapered from the proximal-section diameter down to a reduced diameter which is preferably about 0.10-0.50 mm and between about 10%-50% of the diameter of the core's proximal segment 13. Thus, for example, where the proximal section core diameter is 0.46 mm, the core tapers to a minimum of between about 0.05-0.23 mm. The length of tapered segment 17 is typically between about 10%-50% that of reduced-diameter segment 18, and the two segments together make up the length of the intermediate wire section 14, i.e., about 20-60 cm.

The wire core 16 of intermediate section 14 is covered along its length by a flexible polymer covering 19. The major function of covering 19 is to provide a low-friction surface along intermediate section 14, and more particularly, a surface which has less friction than the

surface of adjacent distal segment 15 and proximal segment 13 (the wire core itself). Covering 19 preferably also functions to provide column support to the reduced-diameter core of the intermediate section, 18, to reduce the tendency of this section to buckle under axial compression.

Covering 19 is preferably formed of a polymer, such as TEFLON™, polyolefin, or polyurethane which can be bonded or otherwise tightly affixed to the core wire, and which itself has a low-friction surface, or can be coated with a low-friction surface. Other suitable coverings include a tube formed from virtually any polymer having exposed hydrogens, such as polyester, polyolefins, polycarbonate, polyvinylchloride, latex or silicon rubber, polystyrene, and polyacrylics, and a surface coating formed of a highly hydrophilic, low-friction polymer, such as polyvinylpyrrolidone (PVP), polyethyleneoxide, or polyhydroxyethylmethacrylate (polyHEMA) or copolymers thereof.

Beneath polymer covering 19, a ribbon of radiopaque metal 22, such as platinum, gold, tungsten, or their alloys is wound around the wire core 16. As shown, the ribbon coil 22 extends from tapered segment 17 of intermediate section 14 at junction 23, to the distal junction 24 of intermediate section 14. The ribbon coil 22 has a thickness of about 0.015 to 0.050 mm, preferably about 0.025 mm and a width of about 0.050 to 0.130 mm, preferably about 0.075 mm. There are approximately 5 to 15 complete turns of ribbon per millimeter of wire core, and preferably about 10 complete turns of ribbon per millimeter of wire core.

The distal section 15 of guide wire 10 is fully or partially encased in flexible sleeve 27. Sleeve 27 shown in Fig. 1 is a soft, flexible helical coil which is formed conventionally, e.g., as a winding of radiopaque wire strand, such as platinum, gold, or tungsten strand. The wire strand has a diameter of about 0.050 to 0.100 mm and preferably about 0.075 mm. As shown, sleeve 27 extends from junction 24 to distal end 12 of guide wire 10. Attachment of the sleeve 27 to wire core 16 is preferably by two or three solder or weld joints, one at proximal junction 24 and a second at rounded distal junction 28.

In addition to providing a mechanism for wire bending near wire tip 12, sleeve 27 also gives distal section 15 of guide wire 10 increased column strength (in the axial direction), and reduces the chance of buckling in this section with axial compression. At the same time, the combined flexibility of reduced diameter core 29 and sleeve 27 are compatible with a series of sharp bends, as the wire is moved through a patient's vasculature. Rounded joint 28 at the end of guide wire 10 acts to shield vessel walls from the sharp end of wire core 16. Further, the distal section of the wire, 15, with the associated sleeve 27, provides the section with a higher frictional coefficient than that of the adjacent intermediate section, 14. The higher-friction surface in this distal section, 15, functions specifically, during a catheter placement operation, to help anchor distal section 15 against

a vessel wall at a vessel junction.

Distal wire core 29 has a substantially uniform cross-section. The core may be cylindrical with diameter of between 0.05 and 0.15 mm or flattened with a rectangular cross-section dimensioned 0.025 mm by 0.075 mm. The wire core has a tapered section at junction 24 that covers between about 10-50% of the core's distal segment.

Fig. 2 is another embodiment of the invention that is essentially the same as Fig. 1 except for the replacement of a portion of helical ribbon coil 22 with inner wire coil 35. At the distal end of helical ribbon coil 22, there is a soft flexible helical coil 24 which is formed conventionally, e.g., as a winding of radiopaque wire strand, such as platinum, gold or tungsten. As shown, coil 35 extends from helical ribbon coil 22 at junction 36 to the proximal end of distal segment 15 at junction 24. This inner coil 35 serves as an anchor point for the distal end of flexible helical coil 22 and also as an anchor point for the polymer covering 19 on intermediate core section 14.

Claims

1. A guidewire (10) for use within a patient's vasculature, comprising in combination:

- (a) a semi-rigid torqueable proximal wire section (13),
- (b) a more flexible intermediate section (14), and
- (c) a most flexible distal end section (15) formed from a distal wire core segment with a helical coil (27) covering the distal end segment and providing column strength thereto,

characterized in that the intermediate section (14) of the guidewire comprises a torsionally reinforced structure (22), the torsionally reinforced structure (22) cooperating with the wire core (16) to improve torque transmission along the guide wire and to increase radioopacity of the intermediate section (14) over that of the bare intermediate core segment without substantially increasing its stiffness.

2. The guidewire of claim 1, wherein the reinforced structure of the intermediate section (22) is formed from a radiopaque material selected from the group consisting of platinum, gold, tungsten and their alloys.

3. The guide wire of any one of the preceding claims, wherein the intermediate section (14) includes a flexible polymer covering (19) which encases an intermediate wire core segment

4. The guidewire of claim 3, wherein:

- (a) the flexible, torqueable proximal wire sec-

tion (13) has an outer diameter between about 0.25-1.00 mm.

(b) the intermediate wire core segment has a reduced diameter of between about 0.10-0.50 mm, and

(c) the distal wire core segment has a reduced cross-sectional area.

5

5. The guide wire of claim 4, wherein the distal wire core segment is cylindrical and has a diameter of between about 0.05-0.15mm

10

6. The guidewire of claim 5, wherein the distal wire core segment is rectangular with cross-sectional dimensions of 0.025mm by 0.075 mm.

15

7. The guidewire of either claims 1,2 and 3, wherein:

(a) the flexible, torqueable proximal wire section (13) has an outer diameter of between about 0.25-0.50 mm, and

20

(b) the intermediate wire core segment (16) has a reduced diameter of between about 0.10-0.20 mm, and

(c) the distal wire core segment has a reduced diameter of between about 0.05-0.13 mm.

25

8. The guidewire of any one of the preceding claims, wherein a platinum helical coil (35) wrapped around the proximal end of the distal section (15) serves as an anchor point for the proximal end of the distal helical coil (27) and the anchor point for the distal end of the flexible polymer tube covering (19).

30

35

40

45

50

55

FIG. 1



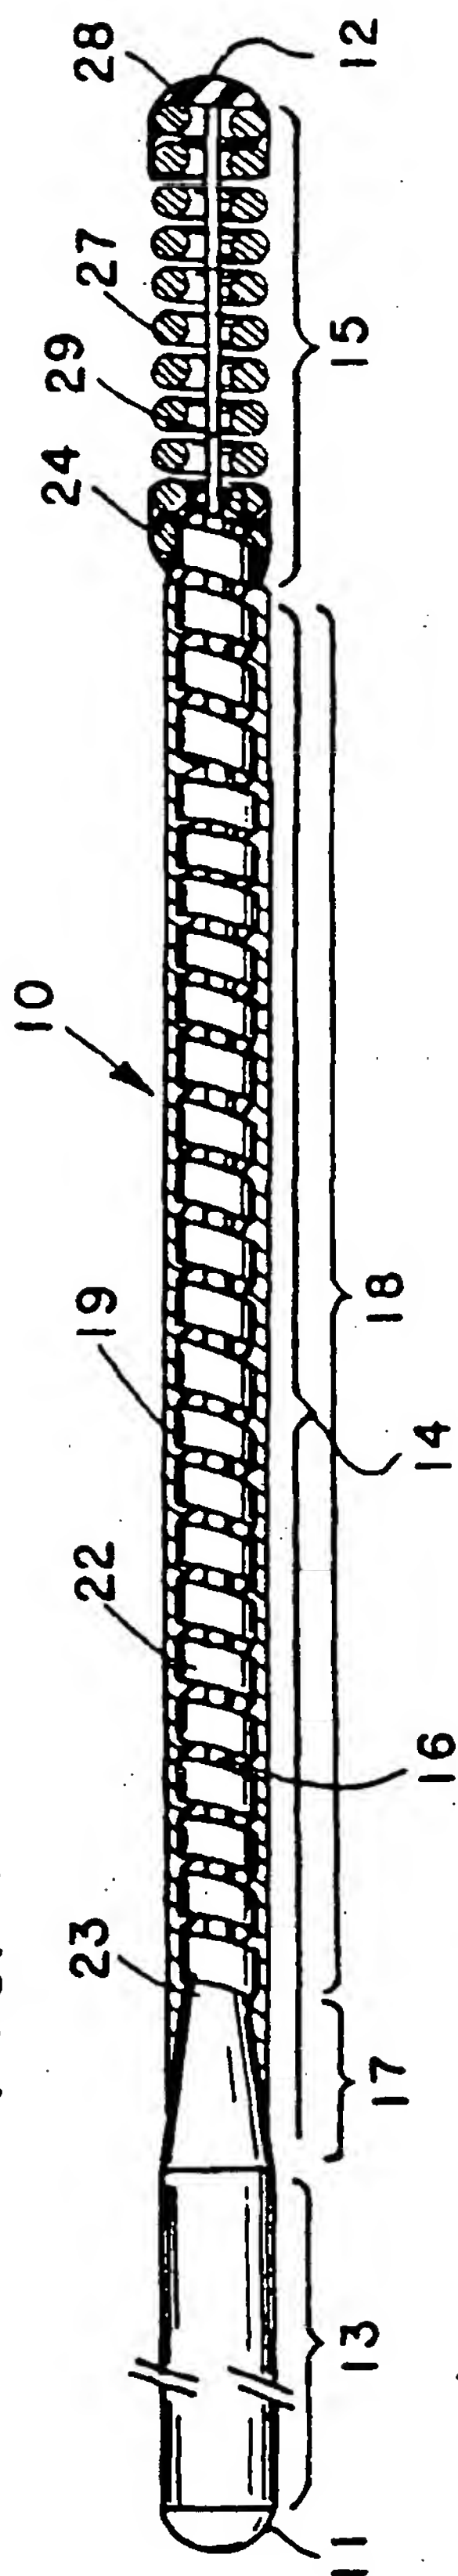


FIG. 2



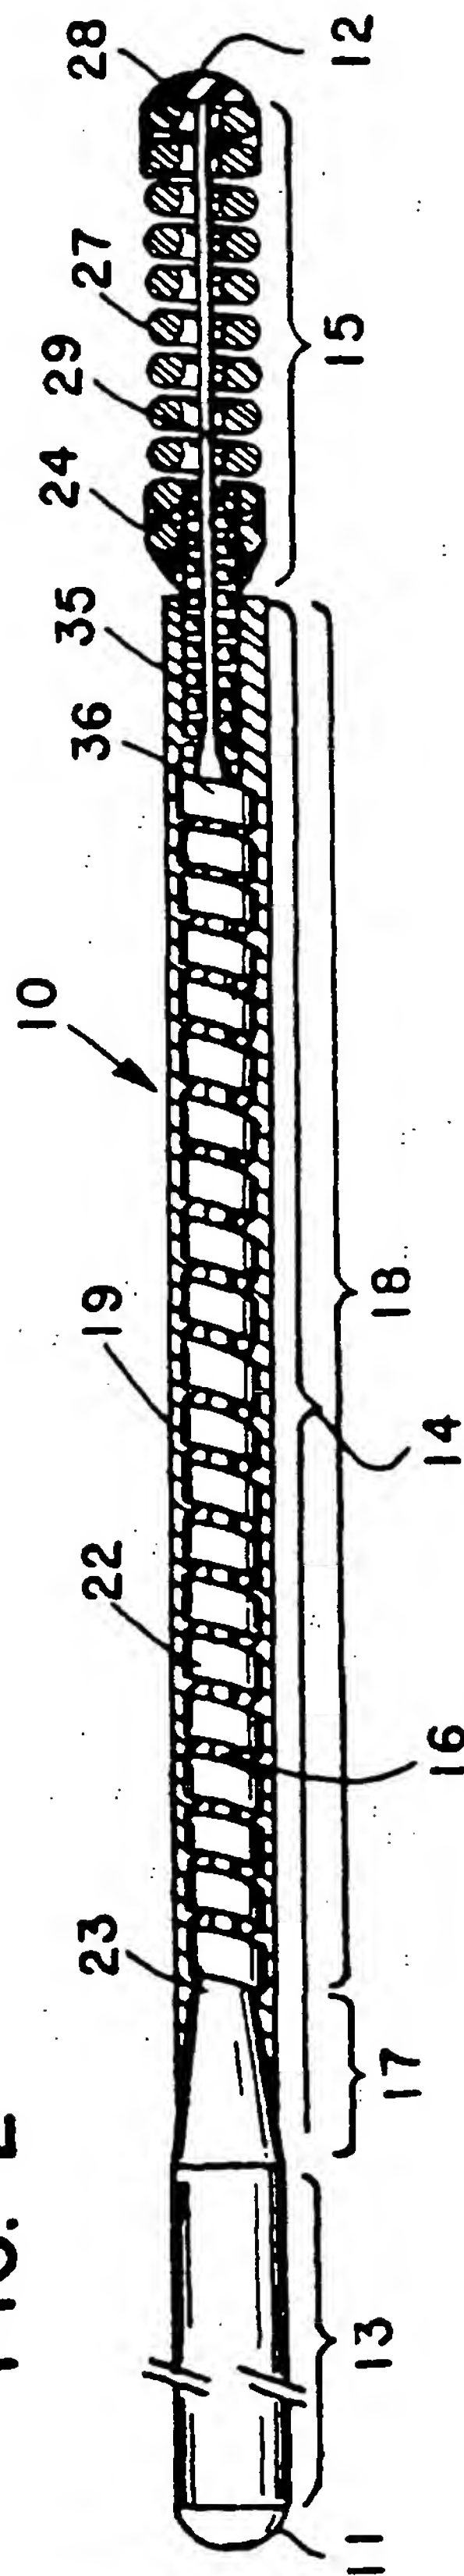

Europäisches Patentamt
European Patent Office
Office européen des brevets

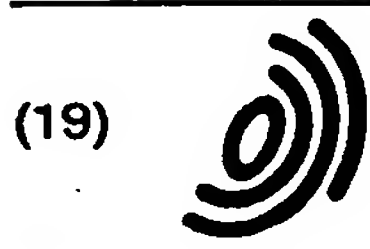

(11) **EP 0 812 599 A3**

(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:
11.03.1998 Bulletin 1998/11

(51) Int. Cl.⁶: **A61M 25/01, A61M 25/09**

(43) Date of publication A2:
17.12.1997 Bulletin 1997/51

(21) Application number: **97114538.8**

(22) Date of filing: **06.05.1992**

(84) Designated Contracting States:
AT BE CH DE DK ES FR GB GR IT LI LU MC NL SE

(30) Priority: **07.05.1991 US 696585**

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
92912258.8 / 0 585 359

(71) Applicant:
TARGET THERAPEUTICS, INC.
Fremont, CA 94537-5120 (US)

(72) Inventor: **Sepetka, Ivan**
Redwood City, California 94063 (US)

(74) Representative:
Price, Nigel John King
J.A. KEMP & CO.
14 South Square
Gray's Inn
London WC1R 5LX (GB)


(54) **Catheter guide wire**

(57) A guidewire (10) for use within a patient's vas-
culature, comprising in combination:

- (a) a semi-rigid, torqueable proximal wire section (13),
- (b) a more flexible intermediate section (14), and
- (c) a most flexible distal end section (15) formed from a distal wire core segment with a helical coil (27) covering the distal end segment and providing column strength thereto,

characterised in that the intermediate section (14) of the guidewire comprises a torsionally reinforced structure (22), the torsionally reinforced structure (22) cooperating with the wire core (16) to improve torque transmission along the guide wire and to increase radiopacity of the intermediate section (14) over that of the bare intermediate core segment without substantially increasing its stiffness.

FIG. 1

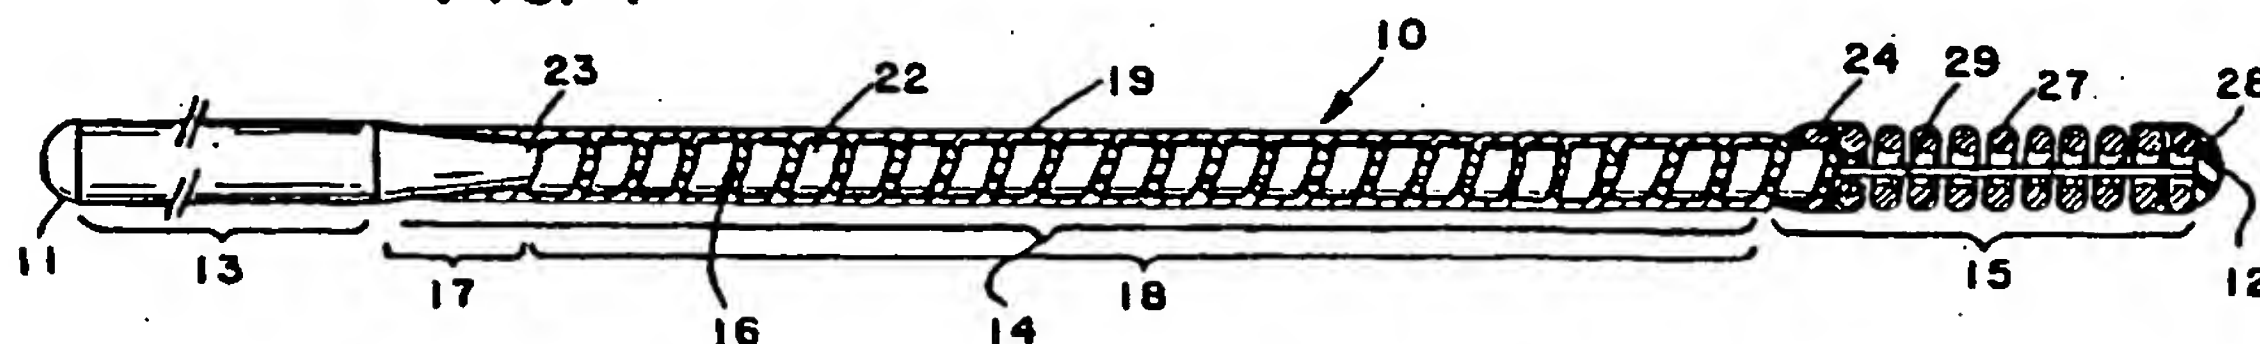

EP 0 812 599 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 97 11 4538

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
Y	US 4 884 579 A (ENGELSON) * abstract * * column 3, line 10 - line 56 * * column 6, line 10 - line 16; claims 1-8; figures 1-6 *	1-8	A61M25/01 A61M25/09
Y	EP 0 386 921 A (MICROSPRING COMPANY, INC.) * abstract * * column 7, line 24 - column 8, line 48; figures 1,4 *	1-8	
A	EP 0 274 412 A (C.R. BARD, INC.)		
A	EP 0 405 823 A (COOK INC.)		
A	US 4 721 117 A (MAR CRAIG ET AL.)		
			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
			A61M
The present search report has been drawn up for all claims			
Place of search		Date of completion of the search	Examiner
THE HAGUE		15 January 1998	Michels, N
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03.82 (P04C01)